

12.1" Color LCD Marine Radar

Model

FR-8065/8125/8255

(6 kW)

(12 kW)

(25 kW)

Furuno's advanced DSP technology brings a new level of performance to marine radar

DSP: Digital Signal Processing



Auto Tuning



AIS



Target Tracking



Enhanced Sunlight Viewable

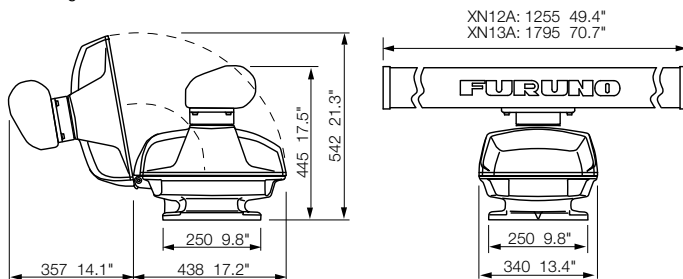
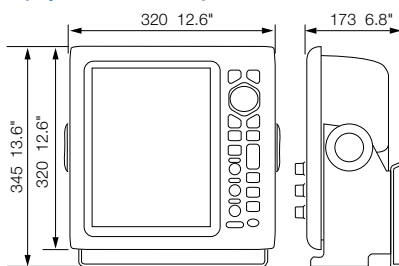

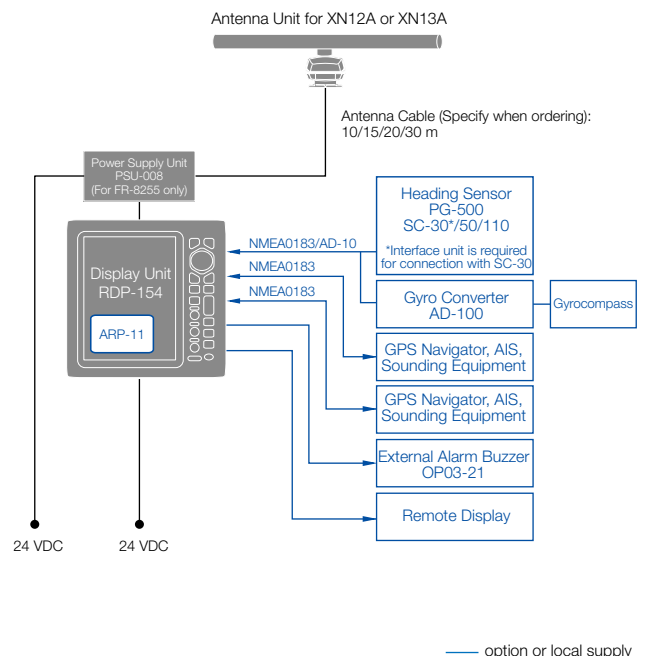


UHD
Ultra High Definition

SPECIFICATIONS

SPECIFICATIONS	FR-8065 (6 kW)	FR-8125 (12 kW)	FR-8255 (25 kW)
GENERAL			
Maximum Range Scale	72 NM	72 NM	96 NM
Range discrimination	25 m		
Bearing discrimination	XN12A: 1.9° XN13A: 1.2°		
Minimum Detection Range	25 m		
ANTENNA			
Length	4 ft (XN12A) or 6 ft (XN13A)*		
Rotation Speed	24 rpm or 48 rpm*		
Wind Load	24 rpm: 100 kn 48 rpm: 70 kn		
Beamwidth (Horizontal)	XN12A: 1.9° XN13A: 1.35°		
Beamwidth (Vertical)	22°		
RF TRANSCEIVER			
Frequency	9410±30 MHz (X-band)		
Output Power	6 kW	12 kW	25 kW
DISPLAY			
Screen Size	12.1 inch color LCD		
Pixel Number	800 (V) x 600 (H) pixels (SVGA)		
POWER SUPPLY			
Power Supply	24 VDC		
Power Consumption	24 rpm: 86.4 W 48 rpm: 93.6 W	24 rpm: 93.6 W 48 rpm: 108 W	24 rpm: 127.2 W 48 rpm: 136.8 W
INTERFACE			
Input / Output	Input: NMEA0183 Ver. 1.5/2.0/3.0/4.0, AD-10 format Output: NMEA0183 Ver. 1.5/2.0/3.0/4.0, contact signal		
ENVIRONMENT			
Temperature	Antenna Unit: -25 °C to +55 °C Display Unit: -15 °C to +55 °C		
Waterproofing	Antenna Unit: IP26 Display Unit: IP55 (front) IP22 (rear)		
EQUIPMENT LIST			
Standard	Display Unit, Antenna Unit, Power Supply Unit (for FR-8255 only), Installation materials and spare parts		
Option	Auto Plotter Kit ARP-11, External Alarm Buzzer OP03-21, Cable assy., Flush Mount Kit		

*Specify the antenna length and rotation speed when ordering.

DIMENSIONS**Antenna Unit**XN12A: 25 kg 55.1 lb
XN13A: 27 kg 59.5 lb**Display Unit RDP-154 5.8 kg 12.8 lb****Power Supply Unit PSU-008 2.7 kg 6 lb****INTERCONNECTION DIAGRAM**

All brand and product names are registered trademarks, trademarks or service marks of their respective holders.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
PLEASE READ MANUAL BEFORE USING THE UNIT**FURUNO ELECTRIC CO., LTD.**Nishinomiya, Hyogo, Japan
www.furuno.com**FURUNO U.S.A., INC.**Camas, Washington, U.S.A.
www.furunousa.com**FURUNO NORGE A/S**Ålesund, Norway
www.furuno.no**FURUNO (UK) LIMITED**Havant, Hampshire, U.K.
www.furuno.co.uk**FURUNO DANMARK A/S**Hvidovre, Denmark
www.furuno.dk**FURUNO SVERIGE AB**Västra Frölunda, Sweden
www.furuno.se**FURUNO FRANCE S.A.S.**Bordeaux-Mérignac, France
www.furuno.fr**FURUNO ITALIA S.r.l.**

Genoa, Italy

FURUNO ESPAÑA S.A.Madrid, Spain
www.furuno.es**FURUNO FINLAND OY**Espoo, Finland
www.furuno.fi**FURUNO POLSKA Sp. z o.o.**Gdynia, Poland
www.furuno.pl**FURUNO EURUS LLC**St. Petersburg, Russian Federation
www.furuno.com.ru**FURUNO DEUTSCHLAND GmbH**Rellingen, Germany
www.furuno.de**FURUNO HELLAS S.A.**Glyfada, Greece
www.furuno.gr**FURUNO (CYPRUS) LTD**Limassol, Cyprus
www.furuno.com.cy**FURUNO SHANGHAI CO., LTD.**Shanghai, China
www.furuno.com/cn**RICO (PTE) LTD**Singapore
www.rico.com.sg1401PDF
Catalogue No. R-205a